


## Specifications for 28mm f2.5 Wide Angle Lens

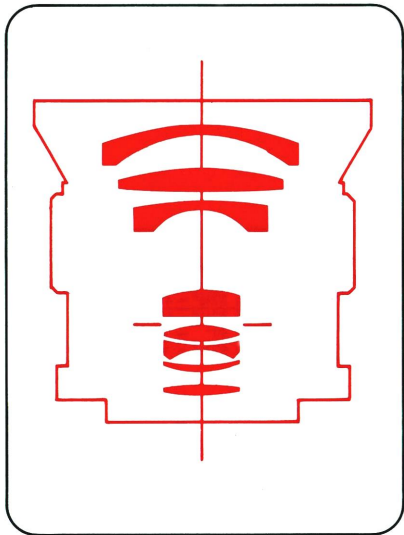

- Elements/Groups: 8/7*  
*Angle of Acceptance: 74°*  
*Aperture Range: f2.5 to f22\**  
*Minimum Focusing Distance from Film Plane: 12" (304 mm)*  
*Weight: 11¼ oz. (318 g)*  
*Length at ∞: 2⅜" (60 mm)*  
*Maximum Barrel Diameter: 2½" (63 mm)*  
*Accessory Size: 67mm*  
*Slip-on Lens Cap Size: 70mm*  
*Accessories Included: Front and rear lens caps*  
*\*Konica Autoreflex Series to f16 only*

*Specifications subject to change without notice. Weights and lengths may vary slightly, depending on lens mount.*

## Depth of Field Tables for 28mm f2.5 Wide Angle Lens

If you need more precise depth of field information than can be obtained by looking through your camera's viewfinder, the following tables will be helpful.

ft. \ f	2.5	4	5.6	8	11	16
1½	1'5¾" ~ 1'6¾"	1'5¼" ~ 1'7"	1'4¾" ~ 1'7¼"	1'4¾" ~ 1'8½"	1'3¾" ~ 1'9"	1'3½" ~ 1'10¾"
2	1'11" ~ 2'1¼"	1'10½" ~ 2'1¾"	1'9¾" ~ 2'2¾"	1'9" ~ 2'4¼"	1'8¼" ~ 2'6¼"	1'6¾" ~ 2'10¼"
3	2'9¾" ~ 3'2¾"	2'8¼" ~ 3'4¾"	2'7" ~ 3'7"	2'5¼" ~ 3'11¼"	2'3½" ~ 4'5½"	1'6¾" ~ 5'9½"
5	4'5¼" ~ 5'8¾"	4'1¾" ~ 6'3½"	3'10¾" ~ 7'½"	3'6¾" ~ 8'6¾"	3'2¾" ~ 11'9¼"	2'9½" ~ 32'4"
10	7'10¾" ~ 13'7"	7'¼" ~ 17'5"	6'3½" ~ 24'11"	5'5¼" ~ ∞	4'7" ~ ∞	3'9¼" ~ ∞
30	16'5¾" ~ ∞	13'¼" ~ ∞	10'7¾" ~ ∞	8'4¾" ~ ∞	6'7¾" ~ ∞	4'11¼" ~ ∞

m \ f	2.5	4	5.6	8	11	16
0.45	0.45 ~ 0.47	0.44 ~ 0.48	0.43 ~ 0.49	0.42 ~ 0.51	0.40 ~ 0.53	0.40 ~ 0.57
0.6	0.59 ~ 0.64	0.57 ~ 0.65	0.56 ~ 0.67	0.54 ~ 0.71	0.52 ~ 0.76	0.48 ~ 0.87
0.9	0.86 ~ 0.98	0.82 ~ 1.00	0.79 ~ 1.10	0.75 ~ 1.20	0.70 ~ 1.36	0.77 ~ 4.76
1.5	1.35 ~ 1.75	1.26 ~ 1.92	1.19 ~ 2.15	1.09 ~ 2.60	0.99 ~ 3.60	0.85 ~ 9.80
3.0	2.40 ~ 4.15	2.15 ~ 5.30	1.90 ~ 7.60	1.65 ~ ∞	1.40 ~ ∞	1.15 ~ ∞
9.0	5.00 ~ ∞	3.95 ~ ∞	3.25 ~ ∞	2.55 ~ ∞	2.00 ~ ∞	1.50 ~ ∞